

# INSTALLATION INSTRUCTIONS

For Model # 1681-14,16-84 (New. 12/18/2002)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

## MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread two Studs (C) about 1/4" into the pre-drilled holes in the Crossbar (A) spaced the same distance apart as the holes in the Canopy (D).
4. Attach the Crossbar (A) to the Outlet Box using the two Screws (B) from the outlet box. The side of the Crossbar marked "GND" must face out.

## CONNECTING THE WIRES (Fig.2)

5. While holding the Light Cluster Assembly (A) towards the ceiling, connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the Crossbar using the Green Screw provided. After wires are connected, tuck them carefully into the ceiling Junction Box.
6. Finish hanging the fixture by placing Canopy (D) over both Studs (C) and secure the Canopy against ceiling with Knurled Knobs (E).
7. Install the light bulbs in accordance with fixtures specifications. **(CAUTION: Do not exceed the maximum wattage rating!)**

## SHADE INSTALLATION (Fig.1)

8. Connect all parts of Center Rod (F) together, then thread it into the bottom coupling of Canopy (D).
9. Thread three Nipples through the holes in the Glass Shade (H) into Coupling (J).
10. Remove Glass Shade (H) to keep Center Rod (F) in the center of Glass Shade, and then tighten with Cap Nuts (I).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

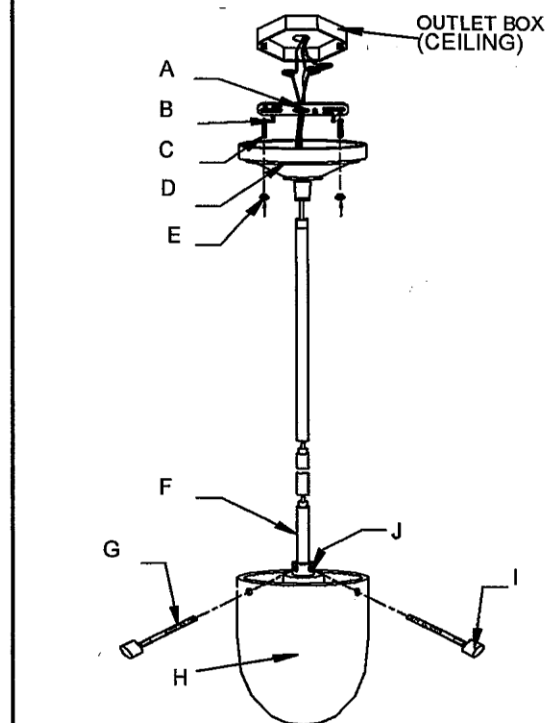


Fig. 2

